



PASER RULES

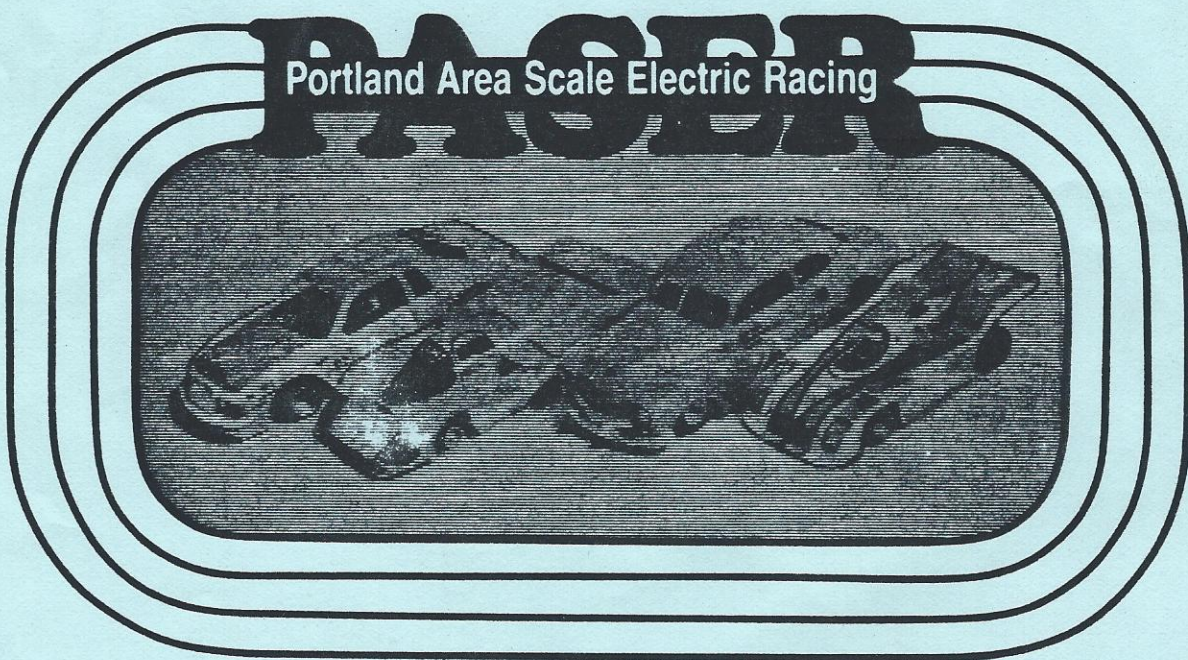

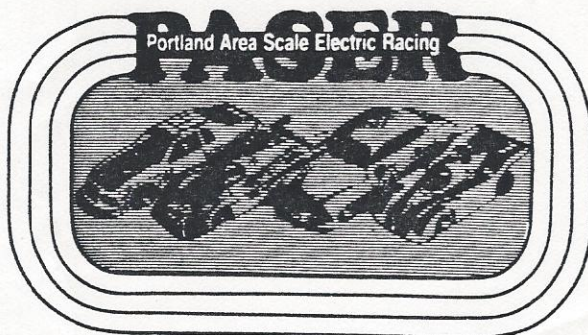

RTR

CHASSIS:

Chassis must be stock RTR Parma or Champion. 1/16" o.d. brass tubing can be soldered to the mounting holes for mounting the body with pins. No additional weight may be added. Bending chassis for proper ride height is permissible. Minimum ground clearance is .055". Maximum tire track is 2 3/4".

BODY:

Any scale body is eligible that is less than 3" in width. Pro or wedge shaped bodies are not eligible. (any controversies or legalities will be judged by Tech Committee) All bodies must be painted and have three racing numbers.


MOTORS:

RTR's can only run stock Parma 16D part number 464.

GENERAL:

All tires must be 3/4" in diameter or larger with black sidewalls. Front tires must turn dependent on each other. Tires or pick-up flags cannot extend beyond the width or length of the body when viewed from above.



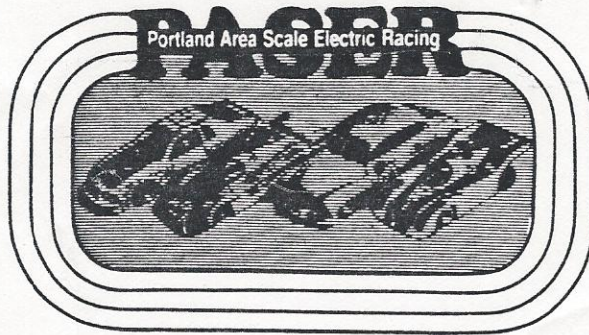

INTERNATIONAL 32

CHASSIS:

Both Eurotoy and Parma 1/32 scale chassis are eligible. Chassis must be stock, except Eurotoy's chassis can add up to $4\frac{1}{2}$ inches of .055" wire to protect the rear of the chassis from bending. No wire may be attached to the motor mount bracket. Parma chassis may add up to a maximum of 2" of .055" wire to keep the rear of the chassis from bending. $1/16$ " o.d. brass tubing can be soldered to the mounting holes for pin mounted bodies. No additional weight or bracing is allowed. Minimum ground clearance must exceed .035". Maximum width for chassis or tire track is 2.5".

BODIES:

I 32's can use any Betta body (Eurotoy) or scale Parma's with a maximum width of $2\frac{1}{2}$ ". (scale Parma bodies are subject to the approval of the Tech Committee) All bodies must have 3 racing numbers, be painted and have a painted driver figure.


MOTORS:

I 32's can run any stock Group 12's or Parma 16D's.

GENERAL:

All tires must have black sidewalls. Tires or pick-up flags cannot extend beyond the width or length of the body when viewed from above.



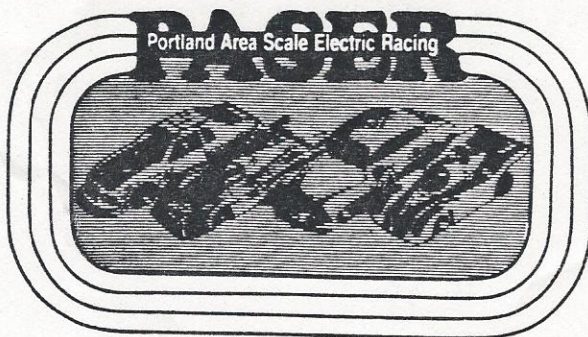

EUROTOY 1/24

CHASSIS:

Same as Eurotoy I32"S except maximum chassis and front tire width is 3" and maximum rear tire width is $3\frac{1}{4}$ ".

BODIES:


1/24 can use any Betta bodies (Eurotoy) or scale Parma with a maximum width of 3". All bodies must have 3 racing numbers, be painted and have a painted driver figure.


MOTORS:

ET 1/24" can run any stock GP 12's or Parma 16D's.

GENERAL:

All tires must have black sidewalls. Tires and pick-up flags cannot extend beyond the width or length of the body when viewed from above.

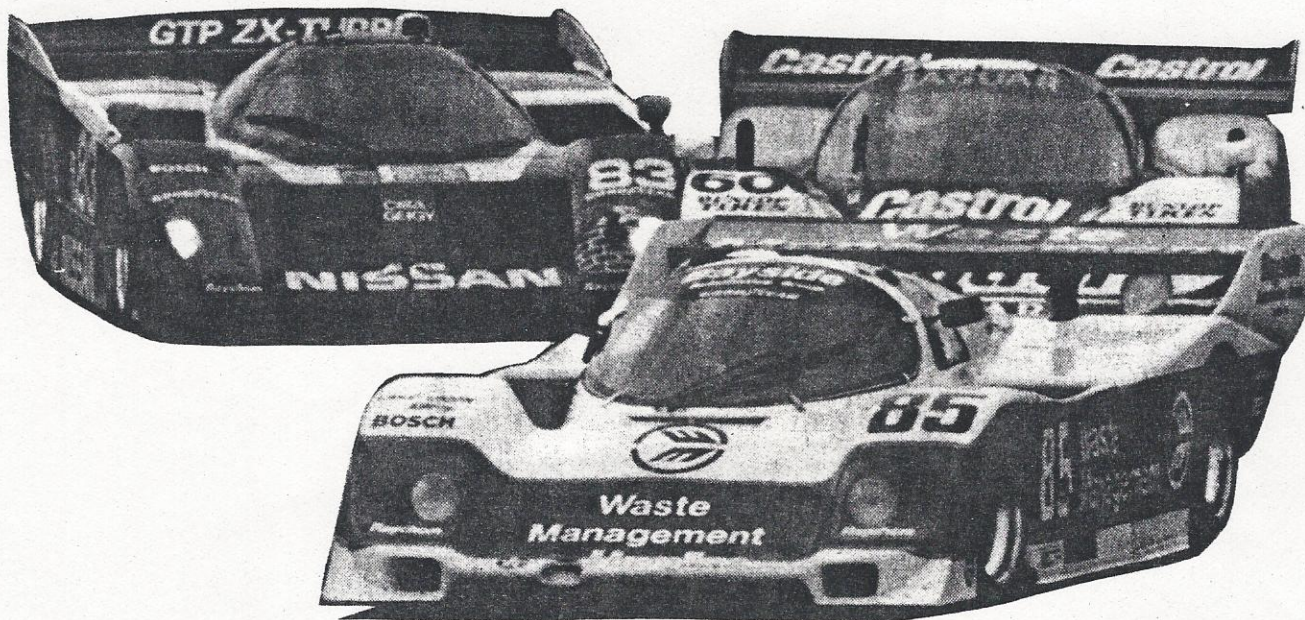

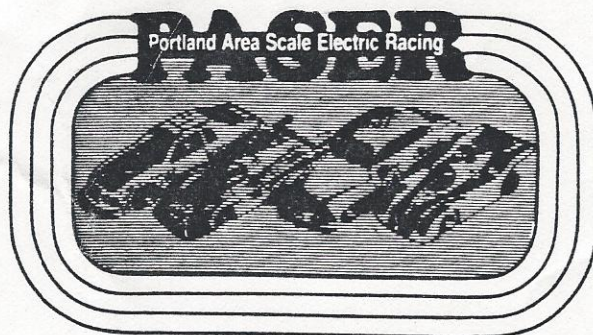

NASCAR

CHASSIS:

Chassis must be of inline configuration with a minimum of .055" ground clearance..

BODIES:

Any molded 1/24 or 1/25 scale, plastic replica of a Winston Cup NASCAR that has run since 1980 is eligible. All bodies must resemble the full scale car that it represents. ASA cars are not permitted. Bodies cannot be altered, except to remove part of the front chin spoiler to achieve proper ground clearance when necessary. Bodies cannot be heated or bent excessively to accommodate the chassis. Drilling mounting pin holes or other holes to attach the body to the chassis is permissible. All bodies must have front and rear windows, three racing numbers, sponsor decals and a painted driver figure.


MOTORS:

All NASCAR's must race with a stock Parma 16D motor part number 461 or 464.

GENERAL:

All tires must be 3/4" diameter or larger with black sidewalls. Tires, pick-up flags or chassis parts cannot extend beyond the width or length of the body when viewed from above, except the front tires and axel can slide sideways a maximum of 3/32" or .094" beyond the body when viewed from above.



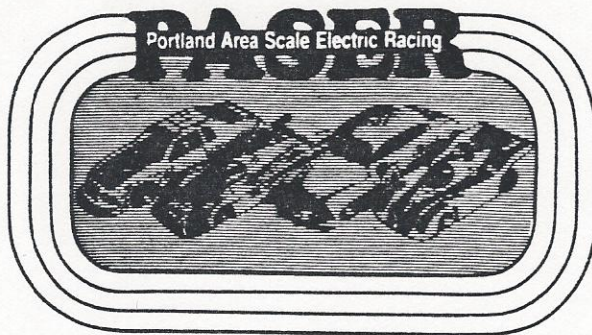

GT

CHASSIS:

Chassis is must be of inline configuration with a minimum of .055" ground clearance.

BODIES:

Any molded 1/24 or 1/25 scale replica of a production sports car from 1950 through 1967 is eligible. Lowering or shaving the the bottom of the body is permissible, as per OSSM rules. No other alteration of the body is permissible, except for mounting pin holes. All bodies must have front and rear windows, three numbers and a painted driver figure.

MOTORS:

All GT's must race with a stock Parma 16D motor part number 464.

GENERAL:

All tires must be 3/4" diameter or larger with black sidewalls. Tires, pick-up flags or chassis parts cannot extend beyond the width or length of the body when viewed from above, except the front tires and axels can slide sideways a maximum of 3/32" or .094" beyond the body when viewed form above.

